

CEANING BOOTH DS

Cleaning booth for spray guns


Providing a well-ventilated and illuminated work area where spray guns can be cleaned, the Cleaning Booth DS can also be used for mixing small amounts of paint thereby avoiding widespread dispersal of solvents throughout the premises. The Cleaning Booth DS is equipped with 3mm Plexiglas windows at eye level as well as four GR-200 filters.


For the recycling of solvents, there is a stainless steel sink with a drain cock where parts can be soaked and washed. This is connected to a vessel with a collection trap where an ingoing wash pistol is connected with the suction hose. The collection trap is mounted behind a double door at the bottom of the cabinet.

The Cleaning Booth DS-140 can be equipped with two drain locks and two washing points as optional extras.



Delivered assembled and ready painted, the Cleaning Booth DS is standard equipped with Zone 2 fittings and LED light fixtures (ATEX classification 3G/zone 2) but can be modified with Zone 1 fittings on request.

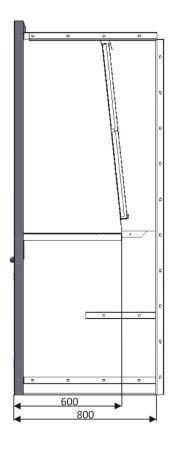

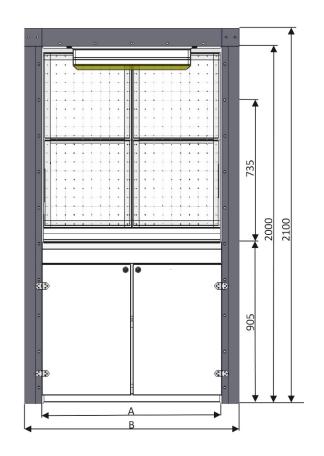



Industrivej 7 | DK - 5600 Faaborg | P: +45 6261 6125 | info@aabo-ideal.com | CVR: 77117911 | ISO14001 CERTIFIED







Type DS	Internal width [A] mm	External width [B] mm	Recommended air flow [m³/s]	Connecting ducts diam. [mm]	Lighting [Lm]
80	800	1000	0,12	200	1 pcs 2500lm
100	1000	1200	0,15	200	1 pcs 2500lm
140	1400	1600	0,20	200	1 pcs 2500lm
200	2000	2200	0,30	200	1 pcs 5000lm

